



# CABLE REEL RACK SYSTEMS

#### 3 SEMI-AUTOMATIC SYSTEMS

- 4 RAMA LA01-LA04
- 9 RESERVOIR SYSTEMS
- 9 FORKLIFT ADAPTERS
- 10 TECHNICAL DATA

#### 11 FULLY AUTOMATIC SYSTEMS

- 12 CABLE CAT RAMA LA05
- 15 AUTOMATED GUIDED VEHICLE (AGV) RAMA LA06

# SEMI-AUTOMATIC REEL RACK SYSTEMS

Semi-automatic cable reel rack systems are designed for flexible production lines, starting from one single cable to small/medium-sized production batches.

Such systems are a perfect addition to any cable processing line and are available in multiple configurations.

#### Convincing advantages:

- economical use of storage and production space
- reels can be fed either from the front or from behind of the reel rack system
- forklift traffic will be reduced by more than 80 percent
- gain in production time through considerable reduction of reel handling and short changeover times
- elimination of manual handling of heavy reels
- maximum flexibility: one drive system allows running different reel dimensions
- balanced cable unreeling via integrated cable reservoir system, no direct pulling
- advantages for the following cable processing lines: low maintenance costs, higher availability and very short production cycles
- connection to various cutting and stripping machines is possible
- the reel rack system can be extended quickly and inexpensively
- all systems can be customized



# THE EASY SOLUTION NOT AUTOMATED



# THE TIME-PROVEN SOLUTION SEMI-AUTOMATIC SYSTEM

## RAMA LA01

Well-ordered reel storage for a good price

Reel rack system without drive unit
Variable number of cable reels
Cable reel diameter up to 1250 mm
Cable reel weight max. 1200 kg

## RAMA LA02

Used for cable processing lines

Reel rack system up to a length of 16 m

Drive system availabe up to reels with 1250 mm diameter


Cable reservoir system for cable diameter up to 35 mm

Reel weight may 800 kg, with special equipment up to 1200 kg.

 $_{4}$ 



# THE SMART SOLUTION SEMI-AUTOMATIC SYSTEM





## RAMA LA03/1

with movable (motorized) platform/ one-sided

Reel rack system RAMA LA03/1 up to 300 cable reels
Reel rack system RAMA LA03/2 up to 600 cable reels
Cable reservoir system for cable diameter up to 35 mm
Reel weight max. 800 kg, with special equipment up to 1200 k
Dereeler unit for reels with max. diameter up to 1250 mm
Platform size customer specific

## RAMA LA03/2


with movable (motorized) platform / two-sided

Cable processing line installed on platform:

- Cutting and stripping machine Speedy 40
- Cable coiler KRI 800 T
- Pneum. reservoir system

Optional: Fully automatic movement of platform to individual cable reels; selection via cutting machine termina



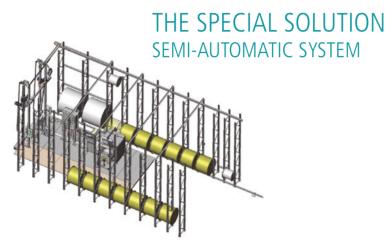

# RESERVOIR SYSTEMS

Different types of reservoir systems depending on cable type and diameter. Gentle cable transport with balanced cable tension. All systems are equipped

with cable recoil detection.







## RAMA LA04 - Storage and rewinding with

with movable (motorized) platform / one- or two-sided

Reel diameter up to 1250 mm Reel weight max. 1200 kg able processing line installed on platform:

- Rewinder for rings and reels (adjustable fixture for coiling
- Cutting unit
- Pneum. reservoir system

Optional: Fully automatic movement of platform to individual cable reels; reel selection via terminal

# FORKLIFT ADAPTERS

Perfect assistance to load cable reels into our reel rack systems.







## TECHNICAL DATA

#### FRAME HEIGHT

Reel rack systems are available in 2.8 m / 3.8 m / 4.8 m (other sizes on request)

#### DIVISION BETWEEN FRAMES

Standard dimension: **600, 800, 1000 oder 1200 mm** (other sizes on request)

CROSSBAR



REEL FLANGE



REEL AXLE



REELSUPPORT RIGHT - LEFT SIDE





# FULLY AUTOMATIC REEL RACK SYSTEM

Our storage systems have pecifically been designed for cable reels and uniquely combine storage and production space. Using cable reels on axles, instead of warehouse pallets, not only allows for a better utilization of approx.25% of the storage space, but also reduces operational costs.

The fully automatic reel storage system "Cable Cat" is up to 50% more efficient and economical than manual or semi-automatic storage systems.







# FULLY AUTOMATIC SOLUTION CABLE CAT

#### Consisting of:


- Reel rack system with fully automatic handlig robot
- Loading station for reel loading and unloading
- Double dereeler with pneum. reservoir system
- Interface to cable processing lines

# RAMA LA05 - CABLE CAT fully automatic

Reel rack system for 200 cable reels and more Reel diameter 400 up to 1000 mm Cable reservoir system for cable diameter up to 35 mm Reel weight max. 800 kg

# ADVANTAGES CABLE CAT

- most economical use of storage and production space
- reduction of internal reel transport and forklift traffic by more than 90%
- short changeover times of max. 60 seconds lead to higher production output
- elimination of heavy manual labour
- balanced cable unreeling by integrated cable reservoir system to ensure ideal cable tension and thus high production quality
- maximum flexibility: simultaneous production with several cable processing lines (rewinding lines as well as cutting and stripping lines)
- connection to various cutting and stripping machines is possible
- the reel rack system can be extended quickly and inexpensively
- all systems are customer specific
- excellent price/performance ratio for large quantities of reels

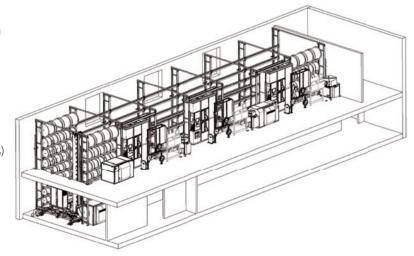

### THE INNOVATIVE SOLUTION

Direct connection of cable processing lines and reel storage via Automated Guided Vehicles (AGV)

- Laser navigation
- Sensors for scanning surrounding area and automatic reduction of vehicle speed (or stop) in case of obstacles
- Forklift attachment for direct loading of cable reels






## RAMA LA06 - AGV fully automated

The driverless transport system

Lifting height up to 8 m

Max. weight of cable reels 1500 kg

Any number of reference points (for vehicle navigation) possible

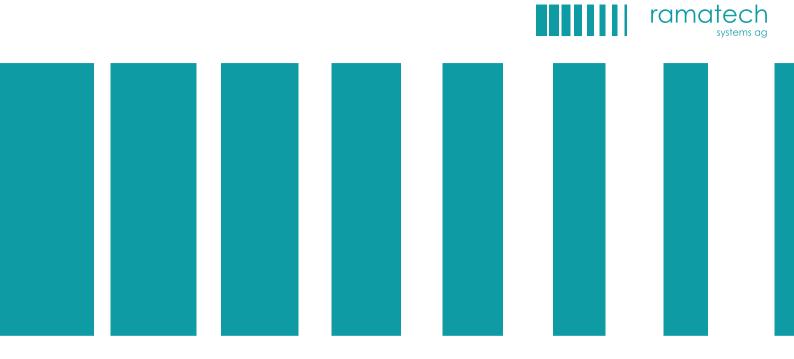

Hohenrainstrasse 36 CH 6280 Hochdorf +41 (0)41 914 26 26 www.ramatech.ch