





## Sortimentskästen für isolierte Aderendhülsen mit Zangen

- alle Sets enthalten folgende Aderendhülsen:  
0,5 / 0,75 mm<sup>2</sup> - 150 Stück  
1,0 / 1,5 / 2,5 / 4,0 mm<sup>2</sup> - 100 Stück  
6,0 / 10,0 mm<sup>2</sup> - 50 Stück

## Sets of insulated end sleeves (ferrules) with crimping tools

- All sets contain the following ferrules:  
0.5 / 0.75 mm<sup>2</sup> - 150 pieces  
1.0 / 1.5 / 2.5 / 4.0 mm<sup>2</sup> - 100 pieces  
6.0 / 10.0 mm<sup>2</sup> - 50 pieces

| Bestückung<br>Set   | Art. No | Inhalt<br>Contents   |
|---|---------|--|
| <b>Bestückungsvariante 1 Set 1</b>  |         |  |
|    | 610 901 | Abisolierzange Art. No. 707 020<br>Crimpzange Art. No. 610 185 3<br>Autom. self-adjusting insul. stripper Art. No. 707 020<br>Crimping tool Art. No. 610 185 3 |
| <b>Bestückungsvariante 2 Set 2</b>  |         |  |
|   | 610 902 | Abisolierzange Art. No. 707 020<br>Crimpzange Art. No. 610 186 3<br>Autom. self-adjusting insul. stripper Art. No. 707 020<br>Crimping tool Art. No. 610 1863  |
| <b>Bestückungsvariante 3 Set 3</b>  |         |  |
|  | 610 903 | Abisolierzange Art. No. 707 020<br>Crimpzange Art. No. 610 088 3<br>Autom. self-adjusting insul. stripper Art. No. 707 020<br>Crimping tool Art. No. 610 088 3 |
| <b>Bestückungsvariante 4 Set 4</b>  |         |  |
|  | 610 904 | Abisolierzange Art. No. 707 020<br>Crimpzange Art. No. 619 090 3<br>Autom. self-adjusting insul. stripper Art. No. 707 020<br>Crimping tool Art. No. 619 090 3 |

## Aderendhülsenzange PE 7.1


- Einsteigermodell zum Verpressen von Aderendhülsen 0,25–2,5 mm<sup>2</sup>
- geschmiedeter Zangenkörper
- gefrästes Trapezprofil




Art. No. 610 001 0

## Ferrule crimping tool PE 7.1

- Entry-level model for crimping 0.25–2.5 mm<sup>2</sup> ferrules
- Forged body
- Milled trapezoidal profile

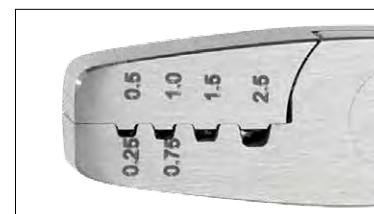

| Art. No.       | Ausführung<br>Finish | Profil<br>Profile  | Kapazität<br>Capacity |      | Länge<br>Length<br>mm | Gewicht<br>Weight<br>g |
|----------------|----------------------|--|-----------------------|------|-----------------------|------------------------|
|                |                      |  | mm <sup>2</sup>       | AWG  |                       |                        |
| <b>PEW 7.1</b> |                      |  |                       |      |                       |                        |
| 610 001 0      | poliert<br>polished  |  | 0,25–2,5              | 28–5 | 150                   | 140                    |