


....the right partner for Harness Maker

Processing:

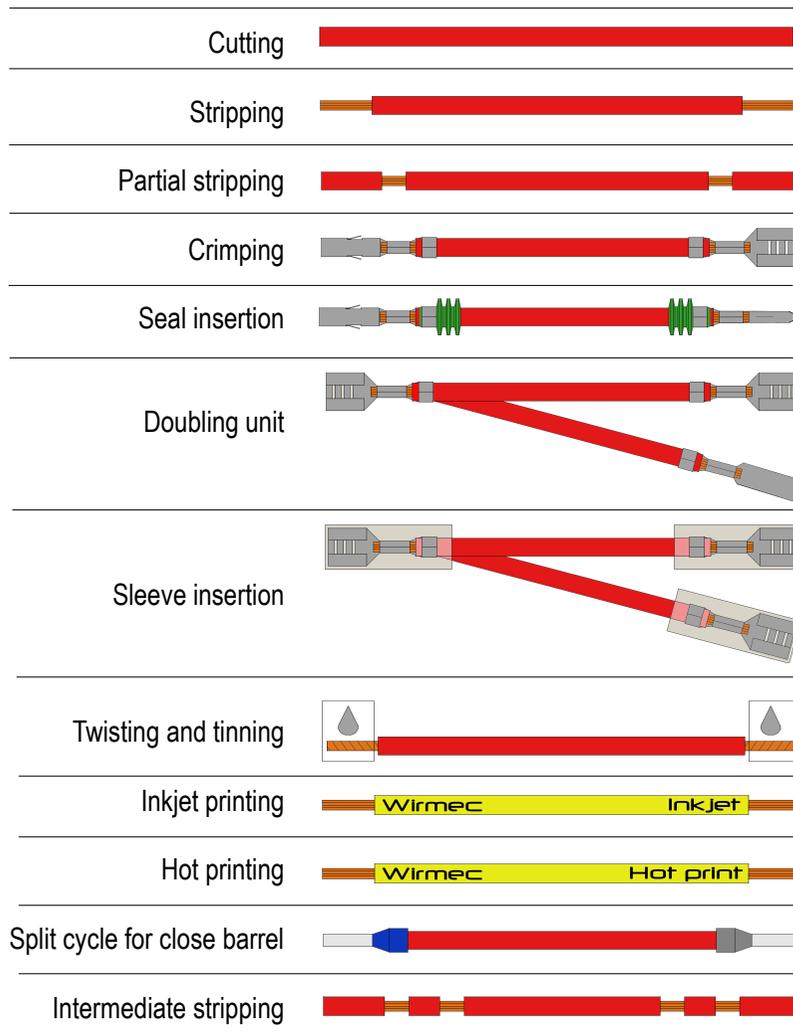

Cut strip and terminate machine derived from more bigger AM500, can be equipped up to five processing stations.



It presents with the most advanced mechanical and electronic technologies, it is versatile for multiple processes. Very simple and intuitive thanks to a user schematic interface.



Key features:

- Equipment up to five processing stations
- Highly ergonomic and easy to maintain
- Electronic crimp height adjustment (optional)
- Crimping height measurement integrated (optional)
- Pull test device integrated (optional)
- Integrated quality control CFA (optional)
- Simple user interface and intuitive
- Ample opportunity to save parameters
- Power cable used indiscriminately roller or belt.

....the right partner for Harness Maker

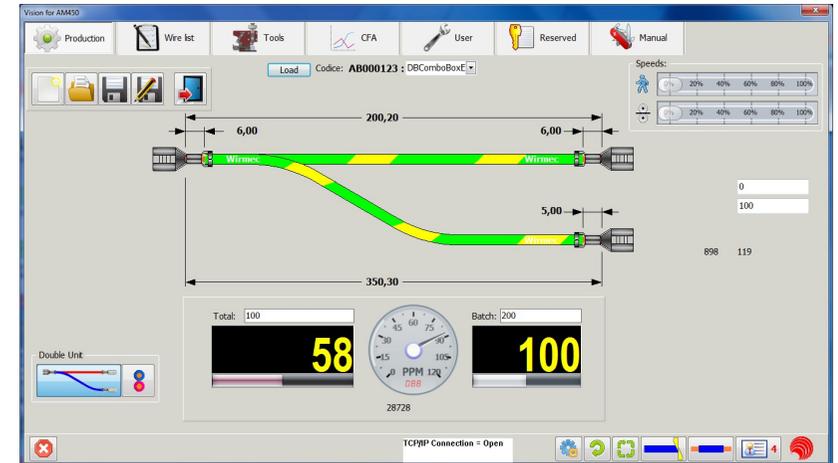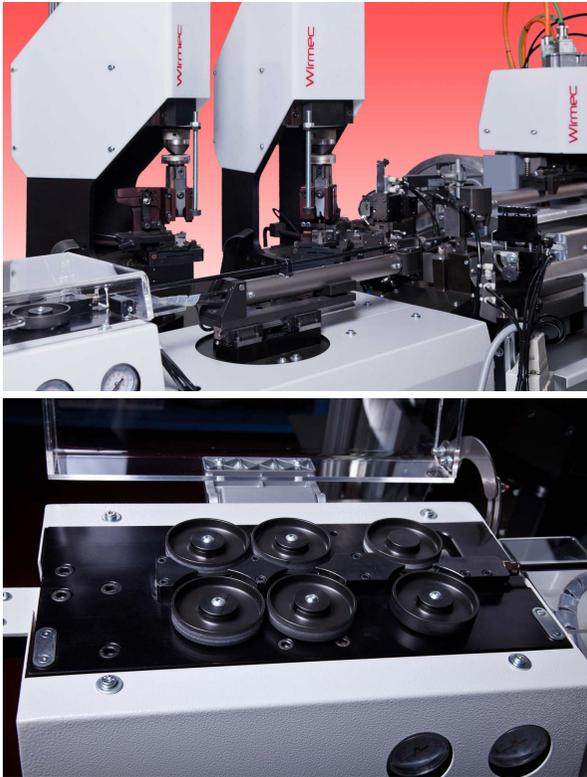

Technical data:

- Wire cross section: 013 – 5mmq (26AWG - 10AWG)
 Wire length: 42mm crimping only one side
 55mm crimping both side
 30mm (optional)
 Strip length: 0,1 – 15mm lato 1
 0,1 – 30mm lato 1 (optional)
 0,1 – 15mm lato 2
 0,1 – 30mm lato 2 (optional)
 Speed feeder: 8,5m/s
 Power supply: 400V 50/60Hz 10kVA
 Air supply: 6-7bar
 Weight: 1200Kg
 Noise: 75dB
 Dimensions: 3400x1400x2000mm

